


Catalytic Treatment for Humidifier WS-MG

The catalytic treatment **WS-MG** permit to :

- Holds rust and dirt.
- Removes chlorine, iron.
- Control the limestone,
- Maintains conductivity.
- Anti scale cartridge does include a flow controller

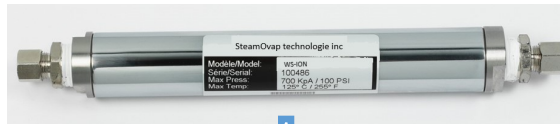

Technical data

Model	WS-MG
Flow :	0.70 GPM (2,7l/min)
Max pressure:	100 P.S.I (700 MPa)
Temperature max :	104°F (40°C)
Dimensions:	14"x14"x5"(35x35x13 cm)
Weight (dry):	8.4 lbs (3.8 Kg)
Connections:	3/8 compression

Contact us:

web: www.steamOvap.com

address: 9495 Charles de la Tour, Montreal, Qc, Canada

tel: +1 844 357 4477 - 00(1) 514 367 4477



STEAMOVP
humidity provider